

BauderGREEN PED PB UK adjustable pedestals

30/09/2025

Product description	A lightweight, adjustable pedestal designed for use on flat roofing. The simple pedestal with a wide range of accessories.
Application	The PB range can be used to achieve depths from 18mm to 955mm. Designed for use on flat roofs (as part of Bauder's blue roof system). Suitable for use with paving, decking and gratings.
Colour	Black
Article number	GB50133110 to GB50133178



Characteristic	Unit	Value
Height	mm	18 to 955
Base Diameter	mm	197
Head Diameter	mm	170
Made from		Copolymer polypropylene (CPP)
Delivery form		Boxes of pedestals and accessories
Weight per box	Kg	<25
Temperature range	°C	-30 to + 80
Visible defects (BS EN 1850-1)		No visible defects
Spacers width	mm	2, 3, 4.5, 6 & 8 (17mm high)
PB Accessories		Tabs- Shims- Slope Correction - Edging Products - Couplers- Joist Support- Low Build Up- Wind Uplift- Membrane Protection


Technical data sheet

DPH PEDESTAL- PRODUCT INFORMATION AND TECHNICAL PERFORMANCE				
Product	Height in mm	Weight in grammes	Compressive Strength in KN	
PB-0-S18	18-28	195	21	SIRRIS Tested
PB-01	28-42	232	10	SIRRIS Tested
PB-1	42-60	309	14	SIRRIS Tested
PB-2	60-90	389	17	SIRRIS Tested
PB-3	90-145	492	16	SIRRIS Tested
PB-4	145-245	692	15	SIRRIS Tested
PB-5	230-315	892	10	SIRRIS Tested
PB-6	285-367	970	10	SIRRIS Tested
PB-7	365-480	1170	14	SIRRIS Tested
PB-8	480-595	1450	11	SIRRIS Tested
PB-9	560-715	1650	12	SIRRIS Tested
PB-10	675-830	1930	10	SIRRIS Tested
PB-11	755-955	2970	12	SIRRIS Tested


Note: Not all Products are listed above:- Combinations of pedestal couplers etc. can be used to achieve depths from 17mm to 1070mm

Installation guidance	<p>The Bauder PB pedestal systems should be installed in line with the Bauder guidance, in particular aligning slope correctors to keep the paving or decking surfaces level. Spacers must always be fitted to keep gaps consistent and ensure adequate drainage. All cuts and edges are retained using the various edging products to prevent joint movement.</p> <p>Note: Bauder pedestals are designed to support external raised floors for pedestrian traffic only and are not designed to support or be subjected to moving and/or vibrating machinery & equipment, including maintenance, cleaning equipment, vehicles and other similar equipment.</p>
Product storage guidance	<p>The product should be stored out of direct sunlight and must not be exposed to temperatures exceeding 35°C. The products must not be exposed to a direct naked flame or other ignition sources, or to solvents or other chemicals covered with a suitable robust UV resistant, flame-retardant tarpaulin. Ensure the product is clear of buildings and any other storage areas. Where there are storage containers on site, these may be suitable for storing products.</p>
Pallet size	12 Boxes per pallet
Packaging material	Cardboard boxes
Handling/PPE	<p>All people using the product should be fully aware of the manual handling methods as roofing materials are heavy and can cause serious injury. When using/handling the product, installers should be provided with, and wear, suitable personal protective equipment.</p>
Shelf life	When stored correctly this product has no stated shelf life.
Recycled Content	80% first grade recycled CPP.
Disposal guidance	<p>Waste of the product is not a hazardous substance. Observe local regulations. European Waste Catalogue EWC number 170203 Plastic Minor Non-hazardous.</p>
Further information/documents	<p>Current documents such as DoC's, DoP's (where relevant), brochures, installation guides, etc. can be found by visiting www.bauder.co.uk</p>
Safety Data Sheet	<p>Safety Data Sheets are designed to provide the necessary information to recipients of substances and mixtures in the EU & UK. This product is classed as an article; therefore, this product does not have a requirement for a Safety Data Sheet.</p>


Technical data sheet

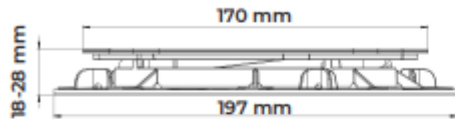


Bauder PB-0-S18

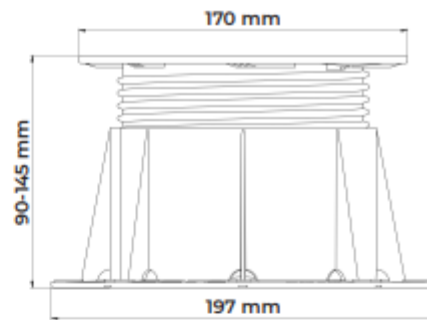


Bauder PB-3

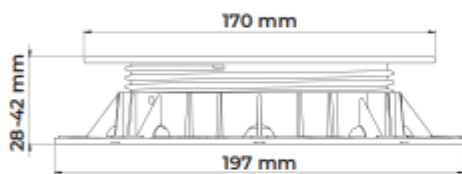

Bauder PB-01

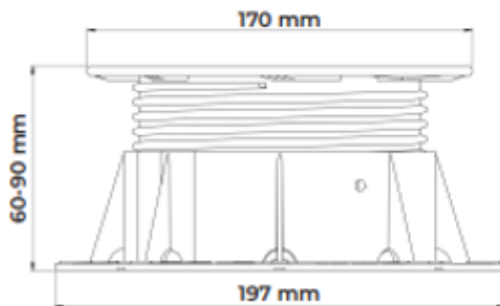

Bauder PB-2

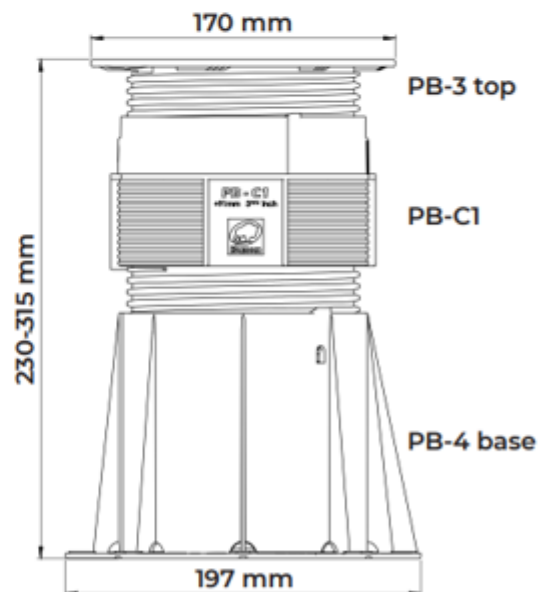

Bauder PB-5

Batten Holder



Aluminium Rail Holder



Spacer Tabs



17mm high
Thickness: 3 and 4.5mm
25mm high
Thickness: 3, 4.5, 6, 8
and 10mm

Shims



U-E10 (T- 1mm)
U-E20 (T- 2mm)