

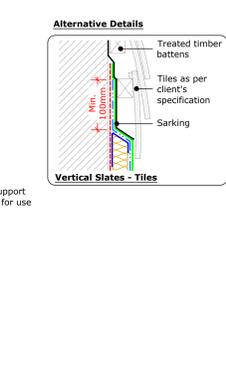



Insulated Upstand
(Drg.No: D0000-00W_201-001)

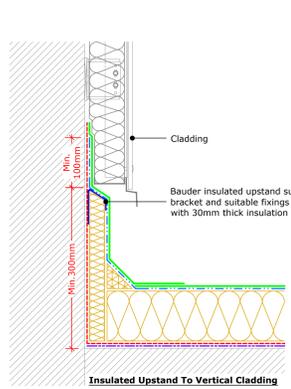



Insulated Upstand to New Vertical Cladding or Slates/Tiles
(Drg.No: D0000-00W_201-002)

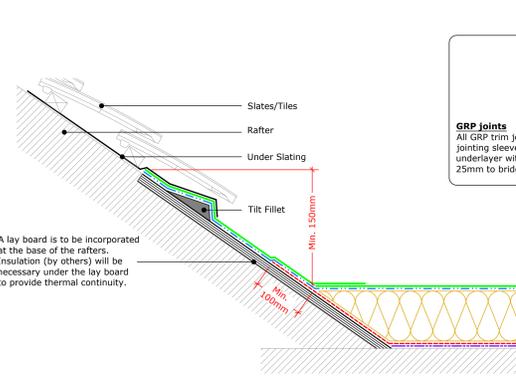


Upstand to Pitched Roof
(Drg.No: D0000-00W_001-004)

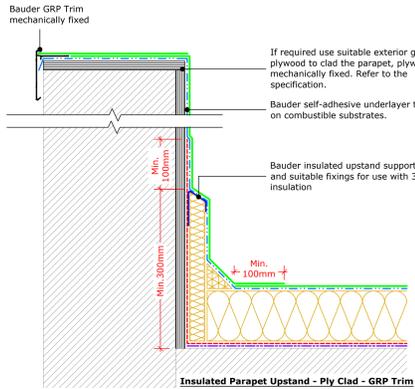


Insulated Upstand to Parapet
(Drg.No: D0000-00W_203-001)

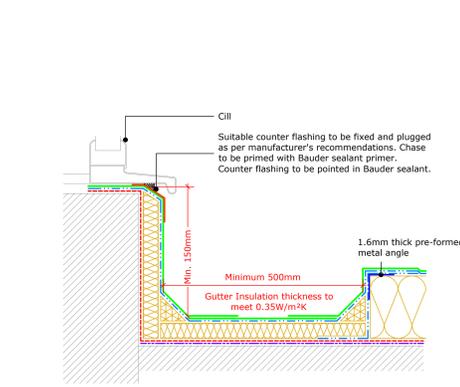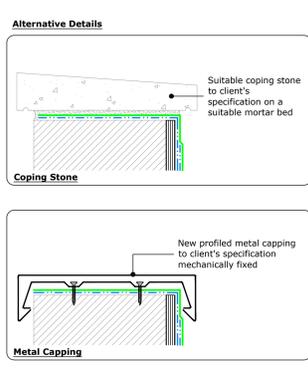


Internal Gutter to Clerestory Window
(Drg.No: D0000-00W_206-003)

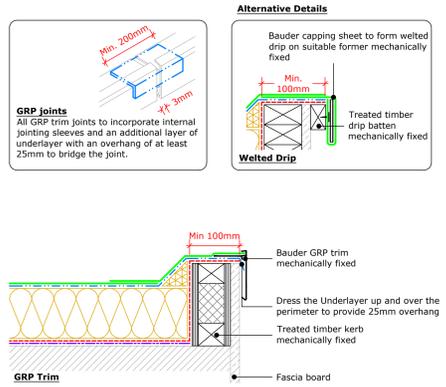


Perimeter Kerb
(Drg.No: D0000-00W_002-001)

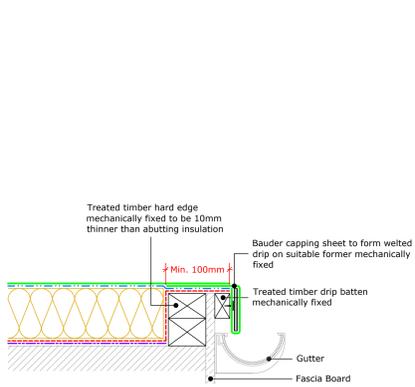


External Gutter
(Drg.No: D0000-00W_006-005)

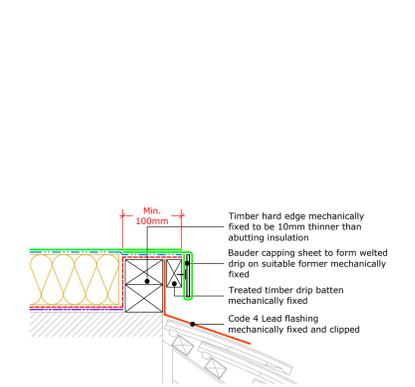


Detail to Mansard Roof
(Drg.No: D0000-00W_006-006)

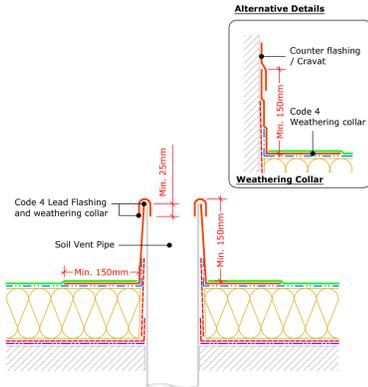


Soil Vent Pipe
(Drg.No: D0000-00W_007-001)

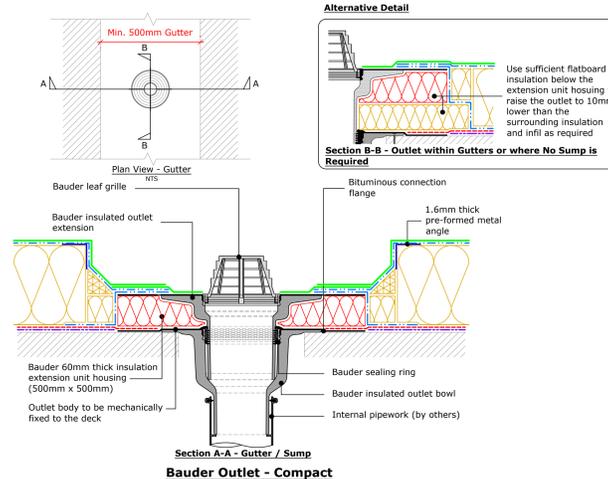


Section A-A - Gutter / Sump Bauder Outlet - Compact
(Drg.No: D0000-00W_006-001)

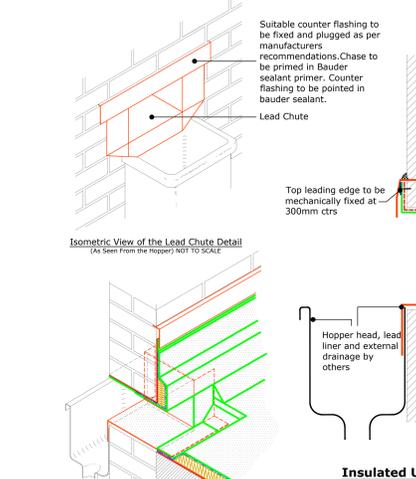


Insulated Upstand - Lead Chute
(Drg.No: D0000-00W_206-002)

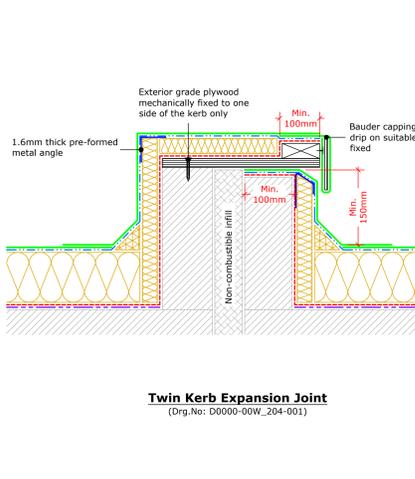


Twin Kerb Expansion Joint
(Drg.No: D0000-00W_204-001)

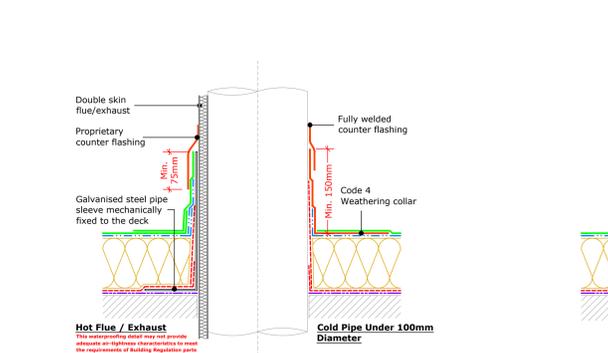


Upstand to Hot Flue Or Cold Pipe
(Drg.No: D0000-00W_007-002)

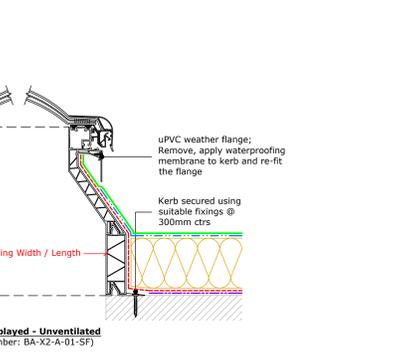

Upstand to Bauder Rooflight - Euroglaze
(Drg.No: D0000-00W_008-001)

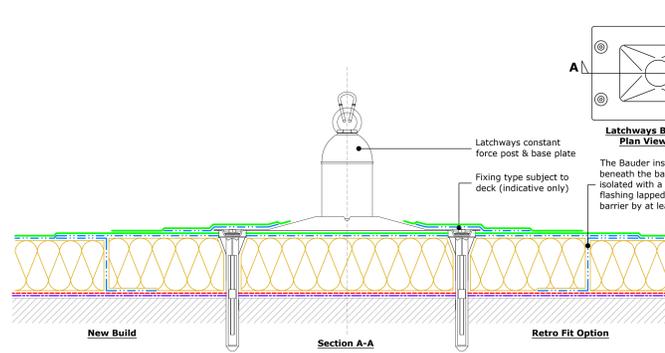

Latchways Constant Force Post
(Drg.No: D0000-00W_009-001)

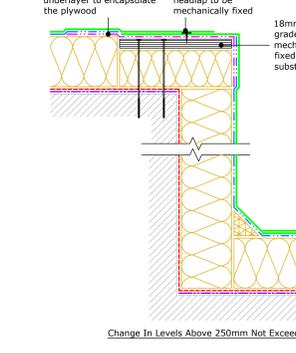

Change In Levels (Insulated Upstands)
(Drg.No: D0000-00W_210-001)

Key

- Bauder Capping Sheet (For all Green Roof details use Bauder Roof Resistant Cap Sheet)
- Bauder Underlayer
- Bauder Insulation
- Bauder Air and Vapour Control Layer
- Use Bauder Self Adhesive Vapour Control Layer on Combustible Substrates
- Bauder Random Nailed Layer used on TIMBER BOARD/DECK ONLY
- Deck / Substrate
- Code 4 Lead Flashing

IMPORTANT NOTES:
1. This detail is suitable for the following Bauder Systems: Bauder Total Roof System, Bauder Total Green Roof System, Bauderflex, Bauderflex Green, Airtach.
2. Do not scale to ascertain dimensions.
3. All dimensions to be checked and verified on site prior to commencement of work.
4. This drawing is to be read in conjunction with the specification and associated drawings.
5. This detail is a guideline only, representing typical detailing conditions and illustrates the correct application of the above Bauder Systems. It may be necessary to modify this detail to suit specific project design constraints and conditions.
6. Refer to the Bauder Specification for the product description and method of application. For clarity the method of attachment has not been shown.
7. Provision should be made by the installer for mechanically fixing the top leading edge of all upstand details in excess of 250mm in height using appropriate fasteners.

COMBUSTIBLE SUBSTRATES:
The details contained within this drawing are deemed to be "Safe to Torch" when using the Bauder Self-Adhesive Vapour Control Layer subject to adequate risk assessments.
For "Torch-Free" detailing see Drawing D0000-00W_200-001TF

BITUMINOUS TYPICAL DETAILS (Insulated Upstands)

Scale:		Drawing Number:		Rev:	
1:5		D0000-00W_200-001		0	
Drawn by:	CD	Checked by:	BC	Approved by:	BC
Issue:		Date:		Issue:	12.10.23

BAUDER

UK OFFICE: Bauder Limited, 70 Lansdown Road, Ipswich, Suffolk IP1 0DN, England. Tel: +44 (0)1473 257671 Fax: +44 (0)1473 230761 Email: technical@bauder.co.uk

IRELAND OFFICE: Bauder Limited, O'Duffy Centre, Cross Lane, Carrigrohane, Co. Wexford, Ireland. Tel: +353 (0)42 9692 333 Fax: +353 (0)42 9692 870 Email: technical@bauder.ie

© Copyright: This drawing is subject to copyright. No part of this document may be reproduced without the permission of BAUDER LTD.