





Insulated Upstand
(Drg.No: D0100-00W_Ad_201-001)

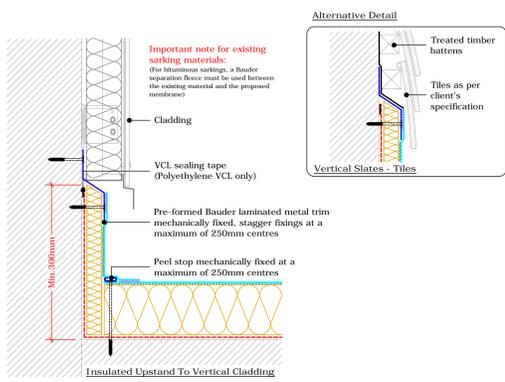



Insulated Upstand to Vertical Cladding or Slates/Tiles
(Drg.No: D0100-00W_Ad_201-002)

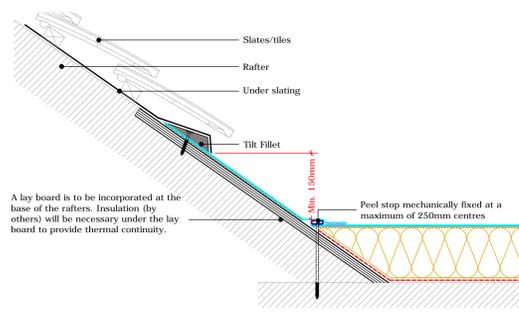



Upstand To Pitched Roof
(Drg.No: D0100-00W_Ad_001-004)

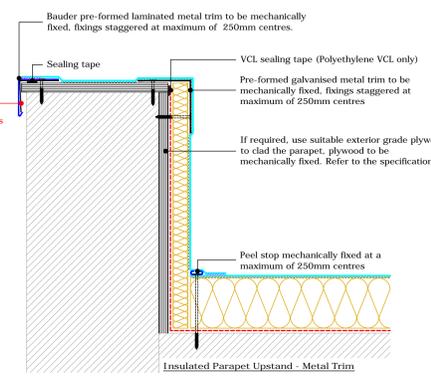


Insulated Parapet Upstand
(Drg.No: D0100-00W_Ad_203-001)

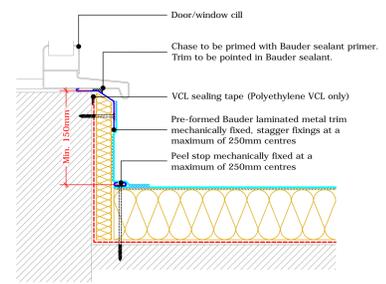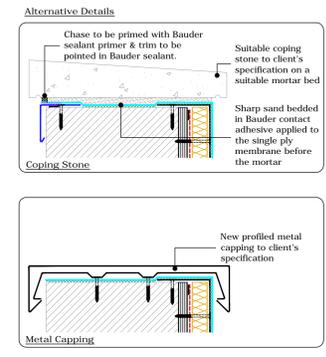


Insulated Upstand to Door/Window Cill
(Drg.No: D0100-00W_Ad_201-003)

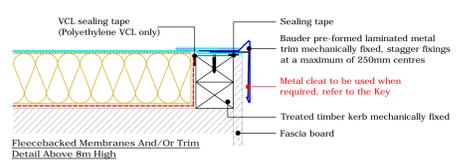





Perimeter Kerb
(Drg.No: D0100-00W_Ad_002-001)

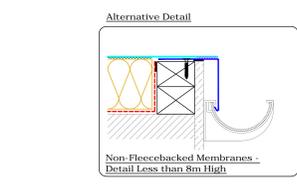


External Gutter - Less than 8m High
(Drg.No: D0100-00W_Ad_006-005)

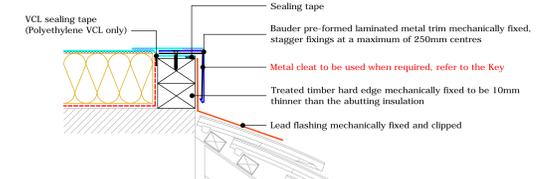


Detail to Mansard Roof
(Drg.No: D0100-00W_Ad_006-006)

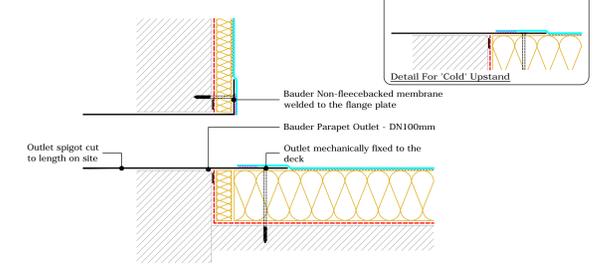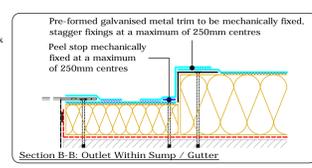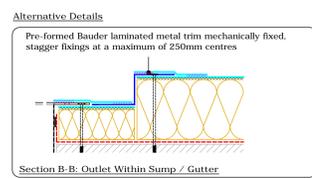


Bauder Rigid Parapet Outlet - DN100
(Drg.No: D0100-00W_Ad_200-001)

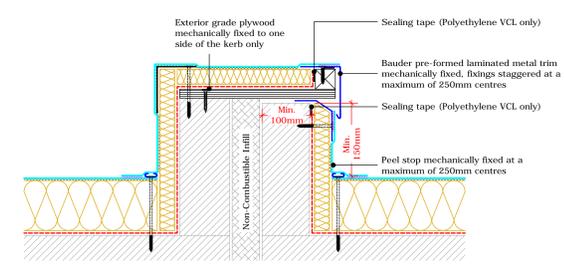


Twin Kerb Expansion Joint
(Drg.No: D0100-00W_Ad_204-001)

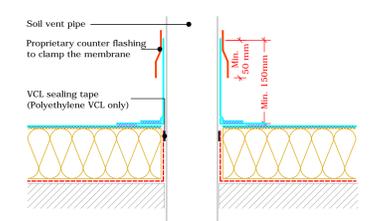


Upstand - Soil Vent Pipe - Upto 150mmØ
(Drg.No: D0100-00W_Ad_007-001)

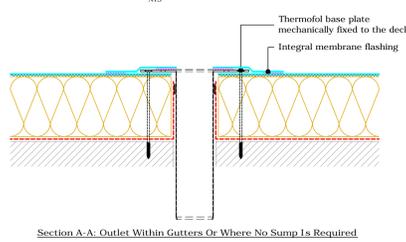


Bauder Outlet - Thermofol Rigid PVC
(Drg.No: D0100-00W_Ad_008-008)

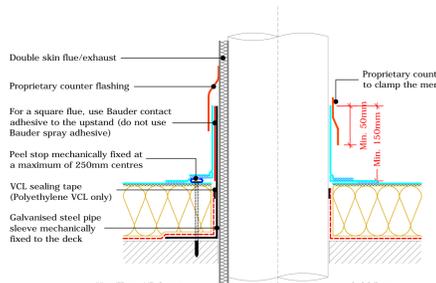



Upstand to Hot Flue OR Cold Pipe
(Drg.No: D0100-00W_Ad_007-002)

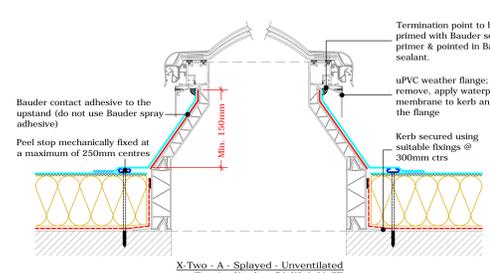


Bauder Rooflight - Euroglaze
(Drg.No: D0100-00W_Ad_008-001)

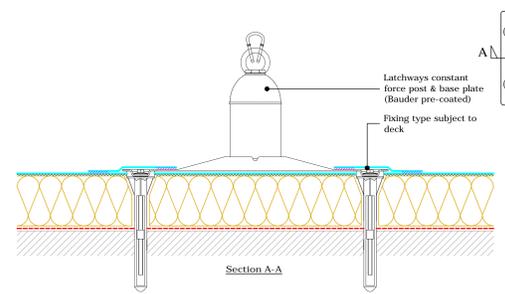

Latchways Constant Force Post
(Drg.No: D0100-00W_Ad_009-001)

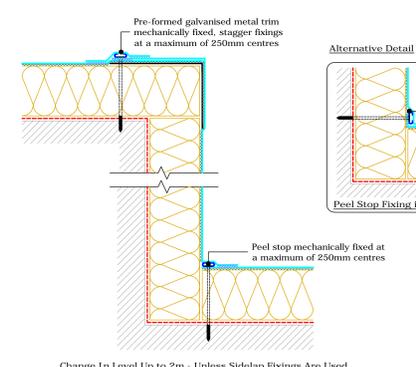

Change In Levels
(Drg.No: D0100-00W_Ad_210-001)

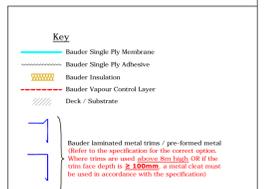

Important note: This drawing shows alternative options. For the correct solution to be used, refer to the project specific specifications.

IMPORTANT NOTES:

- This detail is suitable for the following Bauder Systems: Bauder Thermofol and Thermopren.
- This Drawing Shows Alternative Options. For the Correct Solution to be Used, Refer to the Project Specific Specification.
- Do not scale to ascertain dimensions.
- All dimensions to be checked and verified on site prior to commencement of work.
- This drawing is to be read in conjunction with the specification and associated drawings.
- This detail is a guideline only, representing typical detailing conditions and illustrate the correct application of the above Bauder System. It may be necessary to modify this detail to suit specific project design constraints and conditions.
- Refer to the Bauder Specification for the product description and method of application. For clarity the method of attachment has not been shown.

BAUDER

UK OFFICE: Bauder Limited, 70 Lombard Road, Ipswich, Suffolk, IP1 0DL, England. Tel: +44 (0) 1473 237671 Fax: +44 (0) 1473 237671 Email: technical@bauder.co.uk

IRELAND OFFICE: Bauder Limited, O'Duffy Centre, Cross Lane, Carrigrohane, Co. Wexford, Ireland. Tel: +353 (0) 42 8662 333 Fax: +353 (0) 42 8662 830 Email: technical@bauder.ie

SINGLE PLY TYPICAL DETAILS Fully Adhered

Drawing Number: D0100-00W_Ad_200-001

Scale: 1:5

Drawn by: CD

Checked by: CL

Approved by: CL

Date: 05.07.22

© Copyright. This drawing is subject to copyright. No part of this document may be reproduced in any form, without the permission of BAUDER LTD.