


## Bauder Termination Bar

18.05.2026

<b>Product description</b>	Bauder Termination Bar is available in either black GRP or aluminium and is used for terminating waterproofing membranes at wall abutments where specified.	
<b>Application fields</b>	Bauder Termination Bar offers an alternative to a lead counterflashing for use at upstand details to give protection to the top edge of the waterproofing. It should be restricted to use on upstands where a chase cannot be cut into the wall.	
<b>Article Number</b>	Aluminium	GB60012220
	GRP (Black)	GB60012210
<b>Website Link</b>	<a href="https://www.bauder.co.uk/products/termination-bar">https://www.bauder.co.uk/products/termination-bar</a>	




Characteristic	Unit	Value
Length	mm	2500
Depth	mm	82
Thickness	mm	Aluminium = 1.6 GRP (Black) = 2.5

<b>Normative references</b>	For updated references, the latest edition of the referenced document (including any amendments) applies.
<b>Storage guidance</b>	The product should be stored dry, protected against weathering, and must not be exposed to temperatures exceeding 35°C. The products must not be exposed to a direct naked flame or other ignition sources, or to solvents or other chemicals. Ensure the product(s) are clear of buildings and any other storage areas. Where there are storage containers on site, these may be suitable for storing products.
<b>Packaging material</b>	All products are wrapped in polythene (readily recyclable) for short term protection.
<b>Handling/PPE</b>	All persons using the product should be fully aware of the manual handling methods as roofing materials are heavy and can cause serious injury. When using the product, installers should be provided with, and wear, suitable personal protective equipment. When handling termination bars they should be properly supported along their length to prevent damage.
<b>Disposal guidance</b>	Disposing of any waste material must be carried out in accordance with national regulations. Recommended EWC waste codes: 17 09 04 mixed construction and demolition wastes other than those mentioned in 17 09 01, 17 09 02 and 17 09 03.
<b>Further information/ documents</b>	Current documents such as brochures, installation guides, etc. can be found by visiting <a href="http://www.bauder.co.uk">www.bauder.co.uk</a>

<b>International Standards Organisation (ISO)</b>	<b>ISO 9001:2015 Quality Management</b> Certificates EN1271 (UK)
	<b>ISO 14001:2015 Environmental Management Certificates</b> A10552 (UK)

**Installation Guidance:** Refer to the Bauder Installation Guide and project specification for guidance.

- Bauder termination bar, fixed above (and not through) the completed upstand waterproofing where specified.
- The termination bar is to be correctly positioned and all holes marked and drilled through the 25mm flat fixing area shown on the drawing opposite.
- The contact area of the upstand and the reverse side of the termination bar is then cleaned and primed with Bauder sealant primer and allowed to dry.
- Install with 2 No. beads of Bauder sealant to rear surface of bar, plugged and screw fixed at 300mm centres.
- Bauder sealant should then be applied to the protruding top lip and finished neatly with the correct tooling.

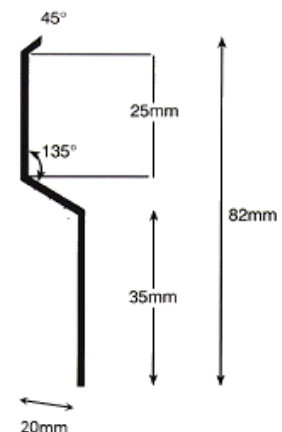

**Safety Data Sheets are designed to provide the necessary information to recipients of substances and mixtures in the EU & UK. This product is classed as an article; therefore, this product does not have a requirement for a Safety Data Sheet.**