


## PRODUCT DATA SHEET

### Bauder SVP Cover

A range of specially designed stainless steel covers with integral membrane flange to facilitate detailing to soil vent pipes on Bauder RBM, Thermofol, LiquiTEC & LiquiTOP flat roof systems.

The unit is supplied in three parts to create an effective seal to the inside of the soil vent pipe, whilst providing a neat, watertight detail.

The range includes variants to cover 110mm and 160mm diameter soil vent pipes that protrude above the level of the proposed new waterproofing system by a maximum of 600mm.

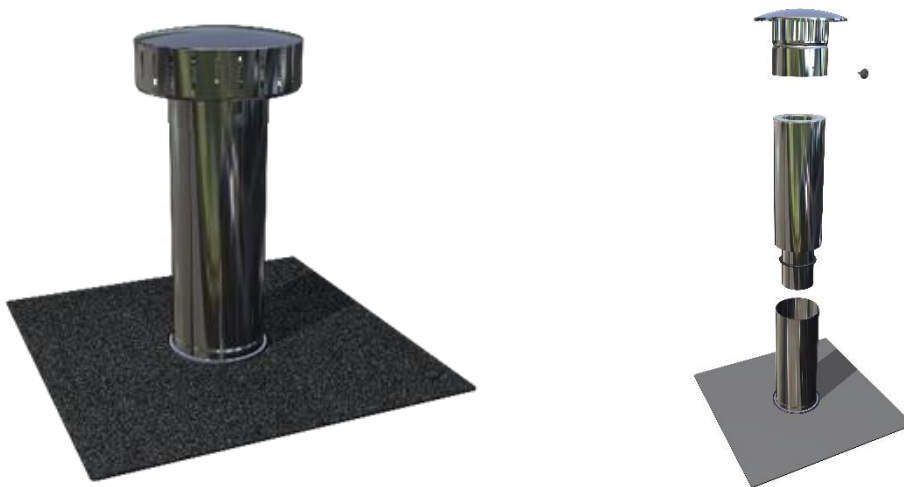

### MAIN CHARACTERISTICS

- Part 1 stainless steel sleeve with factory bonded flange to suit the waterproofing membrane being used.
- Part 2 twin sleeve stainless steel. Outer skin fits tightly over part 1, whilst the inner skin sits within the soil vent pipe with an 'O' ring seal to prevent condensation.
- 3 models available to suit 110mm and 160mm O/D soil vent pipes.
- A choice of PVC or sanded RBM integral flange.
- Adjustable height to suit protruding soil vent pipes up to 600mm high.
- Part 3 stainless steel vented weather cowl.

#### UNITED KINGDOM


Bauder Ltd  
70 Landseer Road, Ipswich, Suffolk IP3 0DH  
T: +44 (0)1473 257671 E: [info@bauder.co.uk](mailto:info@bauder.co.uk)  
[bauder.co.uk](http://bauder.co.uk)

#### IRELAND

Bauder Ltd  
O'Duffy Centre, Carrickmacross, Co. Monaghan  
T: +353 (0)42 9692 333 E: [info@bauder.ie](mailto:info@bauder.ie)  
[bauder.ie](http://bauder.ie)

PRODUCT DATA SHEET

PRODUCT INFORMATION (Refer to diagram below – All dimensions in mm)							
Flange Material	Part Code	Product Dimensions (mm)			To Suit Vent Pipe		
		Part 2	O-Ring Seal Dia.	Part 1	I/D		O/D Max.
		A	B	C	D		E
					Max.	Min.	
RBM	RBM 110	85	12	125	109	87	110
	RBM 250	90	8	250	106	92	248
			10		110		
RBM 160	145	8	180	161	147	165	
PVC – Dark Grey	PVC 110	85	12	125	109	87	119
	PVC 250	90	8	250	106	92	248
			10		110		
PVC 160	145	8	180	161	147	174	

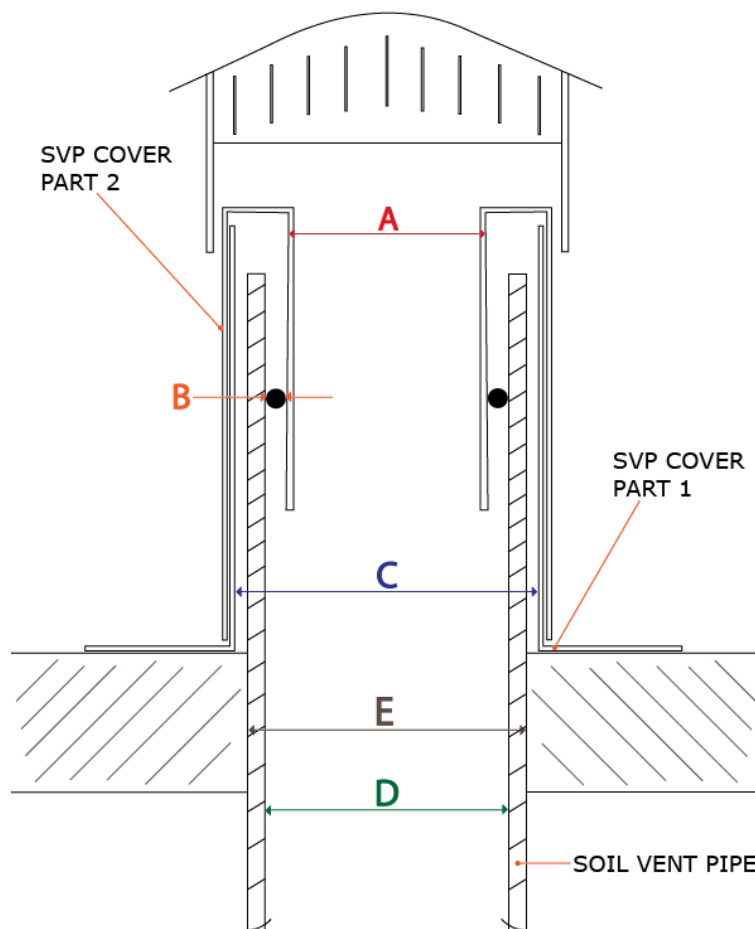

**UNITED KINGDOM**

Bauder Ltd  
70 Landseer Road, Ipswich, Suffolk IP3 0DH  
T: +44 (0)1473 257671 E: [info@bauder.co.uk](mailto:info@bauder.co.uk)  
[bauder.co.uk](http://bauder.co.uk)

**IRELAND**

Bauder Ltd  
O'Duffy Centre, Carrickmacross, Co. Monaghan  
T: +353 (0)42 9692 333 E: [info@bauder.ie](mailto:info@bauder.ie)  
[bauder.ie](http://bauder.ie)

## PRODUCT DATA SHEET

### INSTALLATION INSTRUCTIONS

The photographic sequence below shows how the SVP Cover is installed in a warm roof RBM system. Refer to Bauder detail drawings for correct installation into other systems.



Dress the AVCL up the soil vent pipe a minimum 20mm past the proposed insulation level.



Install the insulation, keeping it as tight as possible to the soil vent pipe.



Install the underlayer, ensuring that it laps with the AVCL and provides a watertight seal to the soil vent pipe.



Slide part 1 of the Bauder SVP Cover over the soil vent pipe, and fully bond the integral flange to the underlayer.

#### UNITED KINGDOM

Bauder Ltd  
70 Landseer Road, Ipswich, Suffolk IP3 0DH  
T: +44 (0)1473 257671 E: [info@bauder.co.uk](mailto:info@bauder.co.uk)  
[bauder.co.uk](http://bauder.co.uk)

#### IRELAND

Bauder Ltd  
O'Duffy Centre, Carrickmacross, Co. Monaghan  
T: +353 (0)42 9692 333 E: [info@bauder.ie](mailto:info@bauder.ie)  
[bauder.ie](http://bauder.ie)

## PRODUCT DATA SHEET



Install the main capsheet, terminating on the flat area at the base of the SVP Cover, and provide a separate capsheet flashing approx. 450mm square to tidy up the detail.



Clean the inside of the soil vent pipe to remove any debris. Slide part 2 of the Bauder SVP Cover over part 1, ensuring that the 'o' ring seals inside the SVP. Install the vented cowl and secure with self-tapping screw.

### LIMITATIONS

This product is designed to waterproof soil vent pipes only and must not be used to cover hot pipes of any kind.

### PACKAGING & STORAGE

Products are supplied in cardboard boxes containing up to 5 complete units. Boxes should be stored in dry premises, at a temperature not exceeding 35°C.

### HANDLING

Consider mechanical or two-man lifting of full boxes which could have a maximum weight of 26Kg. Wear suitable gloves when handling individual component parts due to sharp edges on steel components.

This product is not classified as a substance or mixture under Regulation (EC) No 1907/2006 (REACH) and therefore does not require a separate Safety Data Sheet. Refer to this datasheet and installation instructions for details regarding safe use.

Bauder reserves the right to amend information and product specifications without prior notice. All reasonable care has been taken to ensure that all data is current at the time of print, however because Bauder pursues a policy of constant development we recommend ensuring that your copy of this information is current by contacting our Technical Department at [technical@bauder.co.uk](mailto:technical@bauder.co.uk)

Recommendations for use should be verified as to the suitability and compliance with actual requirements, specifications, installation techniques and any applicable laws and regulations.

#### UNITED KINGDOM

Bauder Ltd  
70 Landseer Road, Ipswich, Suffolk IP3 0DH  
T: +44 (0)1473 257671 E: [info@bauder.co.uk](mailto:info@bauder.co.uk)  
[bauder.co.uk](http://bauder.co.uk)

#### IRELAND

Bauder Ltd  
O'Duffy Centre, Carrickmacross, Co. Monaghan  
T: +353 (0)42 9692 333 E: [info@bauder.ie](mailto:info@bauder.ie)  
[bauder.ie](http://bauder.ie)