


## PRODUCT DATA SHEET

### Bauder LiquiTOP PVC Primer

LiquiTOP PVC Primer is a single pack polyurethane primer for PVC roofing membranes prior to installing LiquiTOP Roof Systems

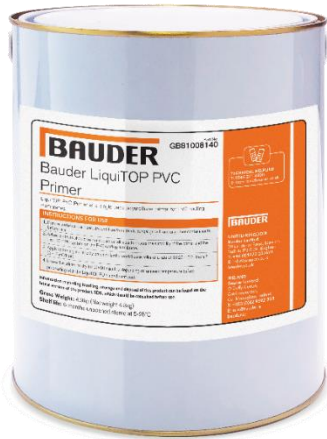

#### Intended Use

LiquiTOP PVC Primer is for use in the Bauder LiquiTOP Roof Systems. It is suitable for use in cold roof and warm roof situations for new build and refurbishment projects.

The product has the following characteristics;

- Improves adhesion
- Compatible with PVC roofing membranes
- Easy to apply to details and surface areas
- Brush or roller applied
- Fast curing

PRODUCT INFORMATION AND TECHNICAL PERFORMANCE			
Characteristic	Test method	Unit	Value
Pack	-	-	Lift top tin
Appearance	-	-	Clear liquid
Tin size	-	Litre	5
Application Rate	-	m <sup>2</sup> /L L/m <sup>2</sup>	5-8 0.125-0.2
Cure Time	-	Minutes	20-60
Application temperature	-	°C	5 to 25
Temperature in service	-	°C	-30 to 100
Storage temperature	-	°C	5 to 25

#### UNITED KINGDOM

Bauder Ltd  
70 Landseer Road, Ipswich, Suffolk IP3 0DH  
T: +44 (0)1473 257671 E: [info@bauder.co.uk](mailto:info@bauder.co.uk)  
[bauder.co.uk](http://bauder.co.uk)

#### IRELAND

Bauder Ltd  
O'Duffy Centre, Carrickmacross, Co. Monaghan  
T: +353 (0)42 9692 333 E: [info@bauder.ie](mailto:info@bauder.ie)  
[bauder.ie](http://bauder.ie)

## PRODUCT DATA SHEET

**INSTALLATION GUIDANCE**

Installation is to be carried out by Bauder Approved Contractors in accordance with the specification and guidelines. Please consult the Bauder Technical Department.

**Installation**

Ensure surfaces are clean, dry, and free from debris, grease, fungal growth and any other contaminants before use.

Apply LiquiTOP PVC Primer by brush or lambs-wool roller. Leave the primer to dry for 20-60 minutes before the area is overlaid or adhered to, depending on ambient temperature.

Adhesion tests should be conducted on all sites to ensure the suitability of the primer and the LiquiTOP PU system on the PVC roofing membrane.

**Storage**

Should be stored unopened in a dry condition at a temperature of 5-25°C.

**Shelf Life**

When stored correctly as detailed above, the shelf life is a minimum 12 months. When manufactured, the product is protected with a layer of nitrogen prior to despatch. This ensures a storage life of 12 months, provided that the container is left unopened in a dry condition at a temperature of 5-25°C. The layer of nitrogen will disappear and the product will have a limited life once the container is opened. It is also important to note that carbon dioxide will be given off if water enters the container, which can cause pressurisation.

Bauder reserves the right to amend information and product specifications without prior notice. All reasonable care has been taken to ensure that all data is current at the time of print, however because Bauder pursues a policy of constant development we recommend ensuring that your copy of this information is current by contacting our Technical Department at [technical@bauder.co.uk](mailto:technical@bauder.co.uk)

Recommendations for use should be verified as to the suitability and compliance with actual requirements, specifications, installation techniques and any applicable laws and regulations.

**UNITED KINGDOM**

Bauder Ltd

70 Landseer Road, Ipswich, Suffolk IP3 0DH

T: +44 (0)1473 257671 E: [info@bauder.co.uk](mailto:info@bauder.co.uk)

[bauder.co.uk](http://bauder.co.uk)

**IRELAND**

Bauder Ltd

O'Duffy Centre, Carrickmacross, Co. Monaghan

T: +353 (0)42 9692 333 E: [info@bauder.ie](mailto:info@bauder.ie)

[bauder.ie](http://bauder.ie)