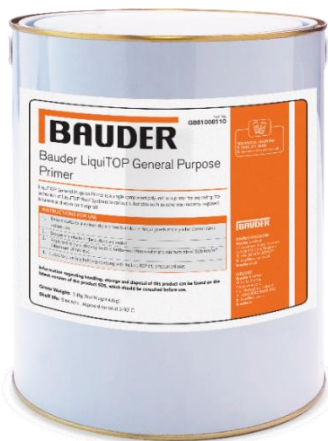


PRODUCT DATA SHEET

Bauder LiquiTOP General Purpose Primer

LiquiTOP General Purpose Primer is a single component polyurethane primer for improving the adhesion of LiquiTOP Roof Systems to various substrates such as concrete, masonry, exposed bitumen and absorbent asphalt.

**Intended Use**

LiquiTOP General Purpose Primer is for use in the Bauder LiquiTOP Roof Systems. It is suitable for use in cold roof and warm roof situations for new build and refurbishment projects.

The product has the following characteristics;

- Easy to apply to details and surface areas
- Brush or roller applied
- Improves adhesion to porous or dusty substrates
- Fast curing

PRODUCT INFORMATION AND TECHNICAL PERFORMANCE

Characteristic	Test method	Unit	Value
Pack	-	-	Lift top tin
Appearance	-	-	Brown liquid
Tin size	-	Litre	5
Application Rate	-	m ² /L L/m ²	16 - 20 0.05 – 0.0625
Cure Time	-	Minutes	60 - 120
Application temperature	-	°C	5 to 30
Temperature in service	-	°C	-30 to 100
Storage temperature	-	°C	5 to 25

UNITED KINGDOM

Bauder Ltd
70 Landseer Road, Ipswich, Suffolk IP3 0DH
T: +44 (0)1473 257671 E: info@bauder.co.uk
bauder.co.uk

IRELAND

Bauder Ltd
O'Duffy Centre, Carrickmacross, Co. Monaghan
T: +353 (0)42 9692 333 E: info@bauder.ie
bauder.ie

PRODUCT DATA SHEET

INSTALLATION GUIDANCE

Installation is to be carried out by Bauder Approved Contractors in accordance with the specification and guidelines. Please consult the Bauder Technical Department.

Installation

Ensure surfaces are clean, dry, and free from debris, grease, fungal growth and any other contaminants before use. Ensure any cracks in the surface are sealed. Apply LiquiTOP General Purpose Primer to the dry surface by brush or lambs-wool/fleece roller. Leave to cure fully before proceeding with the LiquiTOP PU embedment coat.

Storage

Should be stored unopened in a dry condition at a temperature of 5-25°C.

Shelf Life

When stored correctly as detailed above, the shelf life is a minimum 6 months. When manufactured, the product is protected with a layer of nitrogen prior to despatch. This ensures a storage life of six months, provided that the container is left unopened in a dry condition at a temperature of 5-30°C. The layer of nitrogen will disappear and the product will have a limited life once the container is opened. It is also important to note that carbon dioxide will be given off if water enters the container, which can cause pressurisation.

Bauder reserves the right to amend information and product specifications without prior notice. All reasonable care has been taken to ensure that all data is current at the time of print, however because Bauder pursues a policy of constant development we recommend ensuring that your copy of this information is current by contacting our Technical Department at technical@bauder.co.uk

Recommendations for use should be verified as to the suitability and compliance with actual requirements, specifications, installation techniques and any applicable laws and regulations.

UNITED KINGDOM

Bauder Ltd

70 Landseer Road, Ipswich, Suffolk IP3 0DH

T: +44 (0)1473 257671 E: info@bauder.co.uk

bauder.co.uk

IRELAND

Bauder Ltd

O'Duffy Centre, Carrickmacross, Co. Monaghan

T: +353 (0)42 9692 333 E: info@bauder.ie

bauder.ie