


Single Ply warm roof mechanically fastened with PIR insulation

BauderTHERMOFOL PVC Single Ply System

Mechanically fastened, warm roof, single ply membrane waterproofing system suitable for new build, refurbishment and extensive green roof applications. A range of membrane colours are available.

	Function	Product name	Thickness (mm)	Weight (kg/m ²)
1	Waterproofing	BauderTHERMOFOL U 15 FR	1.5	1.8
2	Insulation & membrane attachment method	Mechanically fastened	Nominal	Nominal
3	Insulation (0.15)	BauderPIR FA Flatboard	140	4.2
4	Air and vapour control layer (AVCL)	BauderSYN DB-PE 100	0.16	0.15
System Build-up			141.66	6.15
In-depth and up-to-date product specific technical data is available for each element within a system. Download from our website bauder.co.uk/technical-centre				

Warm roof indicative build-up

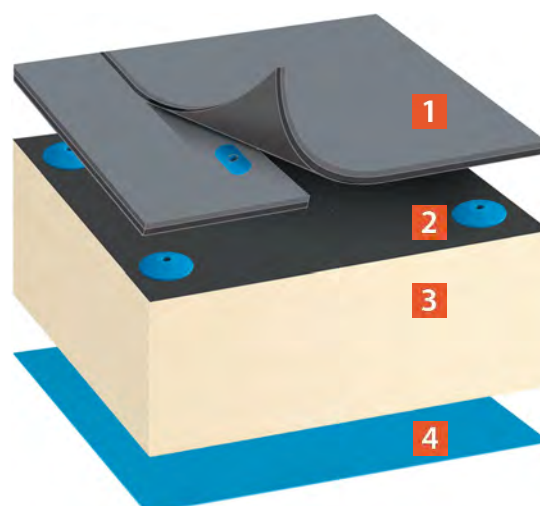

Characteristics of the system

- Flame free installation using hot air welding
- Light weight membrane, typically 2-3kg/m²
- High performance halogen-free fire retardant
- Approved for green roof landscaping by FLL
- Comprehensive guarantee packages to meet project requirements

Accreditations and approvals



System summary



System variations are available to the specifier so that a tailored solution meets the needs of the building. The selection of products should be confirmed with our technical department to ensure suitability for the individual construction requirements of the flat roof.

E: technical@bauder.co.uk

T: 01473 257671

OPTIONS AVAILABLE

In-depth and up-to-date product specific technical data is available for each component within a system. Download from our website bauder.co.uk/technical-centre

Membrane finish colours			
			
	Anthracite (RAL 7016)	Blue Grey (RAL 7031)	Light Grey (RAL 7035)

Membrane alternatives	Thickness (mm)	Weight (kg/m ²)
BauderTHERMOFOL U 12 FR	1.2	1.4
BauderTHERMOFOL U 18 FR	1.8	2.1
BauderTHERMOFOL U 20 FR	2.0	2.4

Membrane AVCL alternatives	Thickness (mm)	Weight (kg/m ²)
BauderTEC DBR 06	0.6	0.7
BauderTEC KSD Foil	1.5	1.8

BauderPIR FA Flatboard Insulation thickness	Approx. 'U' VALUE (W/m ² K)	Weight (kg/m ²)
120mm	0.17/018	3.6
140mm	0.15	4.2
160mm	0.13	4.8
200mm	0.11	6.0

Alternative insulation to achieve 'U' VALUE 0.15 (W/m ² K)	Thickness (mm)	Weight (kg/m ²)
BauderPIR FA G16 tapered	140 average	4.2
BauderPIR FA-TE flatboard	140	4.2
BauderROCK flat/tapered	265/265 average	42.4
BauderGLAS flat/tapered	240/240 average	24.0

Approx. 'U' VALUE (W/m²K) assuming concrete or timber deck and does not take into account any materials below the deck

System fire performance

The system arrangements tested, verified, and that achieve industry standards for fire performance are defined in the relevant BBA certificate. Please ensure you are aware of which permutations currently have a stated performance against fire by viewing and downloading the BBA certificate from our website bauder.co.uk/technical-centre

Bauder continually tests its systems for fire performance and so if the permutation of products you are specifying is not stated in our latest BBA certificate, please contact technical@bauder.co.uk for clarification.