

TECHNICAL DATA SHEET

BauderTEC DBR Vapour Barrier

DESCRIPTION

A technically advanced self-adhesive elastomeric bitumen vapour barrier, featuring an aluminium foil facing for vapour impermeability. The product is thinner than other Bauder vapour barriers and is therefore lightweight. Benefits are a cleaner, safer and faster installation than traditional torch applied membranes.

TECHNICAL DATA:

Weights and sizes

Roll width	1.25 metres
Roll length	60 metres
Thickness:	0.4mm
Weight:	0.4Kg/m ²
Reinforcement:	50g/m ² Aluminium / Polyester combination

Surface finishes


Top:	Aluminium foil
Bottom:	peel off release film covering self-adhesive bitumen

Technical performance

Tensile strength:	length	≥ 950N/50mm
	diagonal	≥ 750N/50mm

Cold bending test:	-40°C
Softening point:	+110°C

Shelf life 9 months from date of manufacture

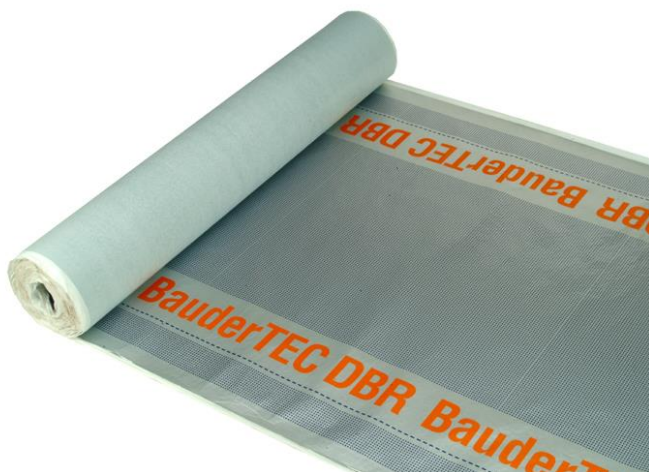

UNITED KINGDOM

Bauder Ltd
70 Landseer Road
Ipswich Suffolk England IP3 0DH
T: +44 (0)1473 257671 **E:** info@bauder.co.uk
bauder.co.uk

IRELAND

Bauder Ltd
O'Duffy Centre Cross Lane Carrickmacross
Co. Monaghan Ireland
T: +353 (0)42 9692 333 **E:** info@bauder.ie
bauder.ie