

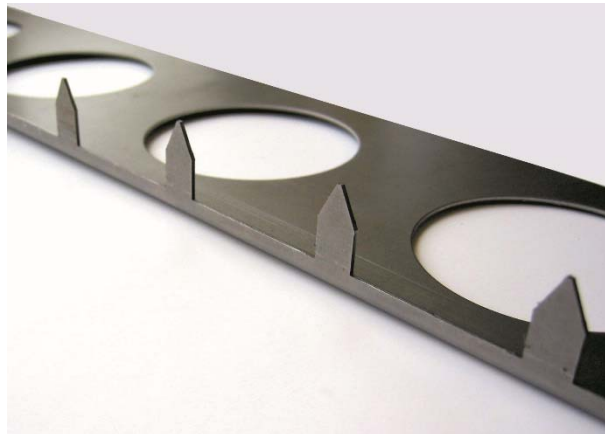
PRODUCT DATASHEET

Bauder Sedum Blanket Retention Strip

The Bauder Stainless Steel Retention Strips are designed to secure Bauder's XF301 sedum system on pitched roofs

Intended Use

The Retention strip are fitted on pitched roofs above 5 degrees, to hold the XF301 system in place. Roofing Membrane is used to securely weld the strips in place. The sharp retention spikes grip the blanket and prevent slippage.

**PRODUCT INFORMATION AND TECHNICAL PERFORMANCE**

Characteristic	Unit	Retention Strip
Material		1.2mm Stainless Steel
Trim Height	mm	22
Dimensions	mm	100 x 800
Supply Form		Boxes of 24 lengths
Warning: The Retention strip spikes are extremely sharp, the protective plastic cover should not be removed until the XF301 Sedum System is being fitted.		

CERTIFICATION AND ENVIRONMENTAL INFORMATION

International Standards Organisation (ISO)	ISO 9001:2015 Quality Management Certificates EN1271 (UK) and 70499/03-15_e (Germany). ISO 14001:2015 Environmental Management Certificates A10552 (UK) and 70499/03-15_d (Germany). ISO 50001: 2011 Energy Management Certificate 70499/03-15_c
Recycled content	NA

INSTALLATION GUIDANCE

Normally installed directly onto waterproofing. The retention strips should be fitted with the spiked edge down the roof. Each roll of XF301 requires at least one retention strip to hold it in place. See Bauder's Green Roof Installation Guide for full details.

UNITED KINGDOM

Bauder Ltd
70 Landseer Road, Ipswich, Suffolk IP3 0DH
T: +44 (0)1473 257671 E: info@bauder.co.uk W: bauder.co.uk

IRELAND

Bauder Ltd
O'Duffy Centre, Carrickmacross, Co. Monaghan
T: +353 (0)42 9692 333 E: info@bauder.ie W: bauder.ie